- obligatorio en algunos estados) Giro por \$7.50 dólares para cubrir gastos de envío y manipulación (no es
- Número de teléfono donde podemos ubicarlo durante el día, nombre y
- $\omega$ Para solicitar servicio cubierto por la garantía, incluya una fotocopia de la de compra que indique la fecha de la venta. factura de compra, emitida por un vendedor autorizado, o alguna otra prueba
- 4) No es necesario devolver los elementos accesorios (adaptador para corriente relacionados con el problema. alterna, baterías, guía del usuario) a menos que puedan estar directamente
- 9 Se aplicará una tarifa plana de 25.00 dólares a toda reparación no cubierta giros o números de tarjeta Master Card o Visa. ¡NO envíe efectivo ni cheques o con pruebas de maltrato. Para el pago, sólo se aceptan cheques de caja, por la garantia o que se realice en unidades de más de un año de antigüedad personales!

#### **Especificaciones**

Las especificaciones son nominales y pueden cambiar.

#### Generalidades

Intervalo de frecuencias

(162.40, 162.425, 162.45, 162.475, 162.50, 162.525, 162.55MHz)

Cantidad de canales ..... Dimensiones 7-3/4" x 4-1/4" x 4" (19.7 cm x 10.8 cm x 10.2 cm) Voltaje de entrada......6 voltios CC

Sensibilidad de código de condado FIPS a desv. de 5 kHz Sensibilidad de silenciamiento (20 dB)... Salida del altavoz a 10% de THD ..... Selectividad de canal ..... Impedancia del altavoz ..... ±25kHz, 60 dB 200 mW máx. 8 ohmios

# CUMPLIMIENTO DE NORMAS DE LA FCC

meteorológicas SAME" 10, "radio digital de alerta de emergencias meteorológicas y no Radio de alerta de emergencias meteorológicas Alert Works modelo EAR-

funcionamiento no deseado. las interferencias que reciba, incluso aquéllas que puedan causar un no debe causar interferencias dañinas; y (2) este dispositivo debe aceptar todas funcionamiento está sujeto a las siguientes dos condiciones: (1) este dispositivo Este dispositivo cumple con la Sección 15 de las Normas de la FCC. Su

Impreso en China

#### **Emergency Alert Weather Radio Model EAR-10**



User's Guide



#### **Juick Start Instructions:**

- Batteries This weather radio operates on AC power or four (4) AA
  alkaline batteries (not supplied). To install batteries, remove battery hatch
  and insert batteries into the compartment on the underside of the unit.
- AC Power Adapter Plug the radio into a standard 120 volt outlet. Plug the AC adapter into the back of the radio at input marked DC 6V 300mA.
- 3) <u>Program the Time</u> Press and release the **MENU** button. "TIME" will be displayed. Press and release the **SELECT** button. Use the **UP/DOWN** directional arrow buttons to set the hour. (Note AM/PM indicator.) Change to minutes by pressing the **RIGHT** directional arrow button, and use the **UP/DOWN** directional arrow buttons to set the minutes.
- 4) Weather Radio Switch Ensure the unit is in weather radio mode by turning the switch on the left side of the unit to ON.

# 5) Program the Weather/Hazard Channel for Your Area

- Turn switch on the top left side of radio to the **ON** position.
- Press MENU.
- Press UP directional arrow until "CHANNEL" is displayed
- Press SELECT.
- Press UP directional arrow until you hear the broadcast of your station.
- Press SELECT to save station selection.
- Press MENU to close menu mode.
- Press WEATHER/SNOOZE to turn Weather/Hazard broadcast on again.

ou are now able to receive weather alerts for your area and urrounding areas.

or the best possible reception, pull out the antenna and extend it to s full length above the weather radio.

#### Table of Contents

SpecificationsFCC Compliance Information	One Year Limited Warranty	Reviewing Recent Alerts(Criart)	About NOAA	Froubleshooting	Weather Channel Frequencies	Test Signals Broadcast by NWS	Nert Off Option	Programming Alert Type (DISPLAY, VOICE, or TONE)	Adding New S.A.M.E. Event Codes	Reviewing the S.A.M.E. County Codes You Have Programmed	To Program Multiple S.A.M.E. County Codes	To Program a Single S.A.M.E. County Code	"ANY" S.A.M.E. County Codes is Factory Default	National Weather Radio Website	The National Weather Service Toll-Free Number	Getting & Programming Your S.A.M.E. County Code(s)	If You Hear More Than One Channel	If No Program Buttons Are Pressed	Start Over	Programming Notes	Setting the Clock and Alarm	Backlight on the Display	CONS on the Display	EAR-10 Features and Controls	Product Information	Table of Contents	Quick Start Guide
666	ᅔᄚ	1 5 4	: 23	12	그	<u></u>	10	10	9	9	φ.	ထ	ω -	7	7	7	6	o	တ	6	0	6	Ch	Ö	4	ω	N

#### roduct Information:


nank you for choosing the Alert Works EAR-10 Emergency Alert Weather Radio. our new weather radio is the latest in weather and hazard alert monitoring schnology, providing you with the information needed to keep you safe. This eather radio has a special receiver that tunes to the 24/7 broadcast issued by the ational Weather Service. The combined All Hazards/Weather Alert broadcast stwork is the single, most immediate source for comprehensive weather and mergency information available instantaneously to the public, in advance of TV and radio bulletins.

his Alert Works EAR-10 Emergency Alert Weather Radio has an innovative utomatic alert system. In the event of special warning broadcasts, the radio is utomatically activated along with a loud tone, an LED indicator, and an "alert" lessage in the LCD. Emergency weather bulletins include alerts about tornadoes, urricanes, floods, ice/snow storms, and other severe weather. Other mergencies might include Amber alerts, hazardous explosions, fires, chemical pills, and other civil emergencies.

addition, this weather radio has the Specific Area Message Encoding S.A.M.E.) Digital Weather/Hazard Alert feature, providing you with constant ionitoring of your local NWS broadcast. The S.A.M.E. decoding receiver allows ou to hear only messages for the area(s) of concern to you. Now YOU can hoose what information will be brought to you. No more will you be awakened hear of a problem many miles from your home that will not affect you.

We encourage you to read this User's Guide thoroughly before operating this adio. This manual is a valuable part of your new Alert Works EAR-10 mergency Alert Weather Radio. Please see the "Quick Start Instructions" ection of this manual for the initial weather radio setup and programming. After its weather radio is programmed and operating properly, store the manual in a afe place.

# Alert Works EAR-10 Emergency Alert Weather Radio Features and Controls:

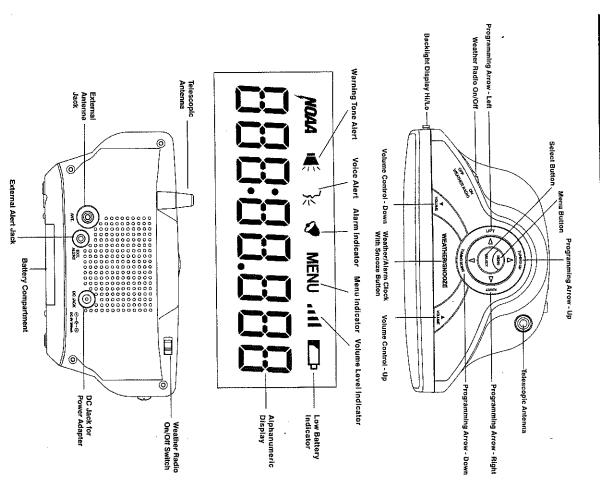

#### **lacklight Display:**

he switch on the left side of the unit controls the "Hi" or "Low" backlight display.

#### rogramming Notes:

- <u>Start Over</u> If you want to start over while programming, press MENU continuously until the unit exits the programming mode.
- If no program buttons are pressed for about one minute the weather radio will exit the menu mode.

### rogramming the Clock:

- Press MENU to open the menu options.
- Press UP directional arrow to scroll through the menu until you see "TIME."
- Press SELECT. (HOUR option will begin flashing)
- Press UP directional arrow until current hour is displayed. Note that AM/PM changes as you scroll through the hours.
- Press RIGHT directional arrow to save current hour and advance to minute settings.
- Program the minutes the same way as with the hours
- Press SELECT to store the current time. Press MENU to exit the programming mode.

### rogramming the Alarm:

- Press MENU to open menu options,
- Press UP directional arrow to scroll through the menu until you see "ALARM." Then press SELECT.
- Press **UP** directional arrow to display "ON". Press **SELECT**. This will activate the alarm time options. You will see the alarm hour flashing.
- Press UP directional arrow to select the hour you want displayed. Note that AM/PM changes as you scroll through the hours.
- Press RIGHT directional arrow to save the alarm hour and advance to the alarm minutes. Program the minutes the same way as with the hours.
   Press SELECT to save the alarm time. The display will show "ON," and
- Press SELECT to save the alarm time. The display will show "ON," and the alarm icon will be displayed.
- Press MENU to exit the programming mode.

To temporarily silence the sleep alarm, press **WEATHER/SNOOZE**. This will advance the alarm time by 9 minutes. To silence the alarm for the remainder of the day, press **MENU**.

# Specific Area Message Encoding (S.A.M.E.) County Codes:

In addition to your own county code, you can get the S.A.M.E. county code(s) for other counties close to you, especially the counties in the direction from which most of the storms come.

Determine the counties you are interested in. To acquire the S.A.M.E. county codes, contact one of the following:

# The National Weather Service Toll-Free Number

1-888-NWS-S.A.M.E. or (1-888-697-7263)

When you call the NWS toll-free number, automated instructions will guide you to the S.A.M.E. county code(s) you need. The number will be six digits long.

- You will hear, "Welcome to the National Weather Service. You have reached the Specific Area Message Encoding Program Service."
- If you select "touch-tone" to make your entries, you will be prompted to "identify" (enter) the name of your state.
- Next you will be prompted to "identify" (enter) the county name.
- Then you will hear, "Your geographic code is xxxxxx." (This is your S.A.M.E. county code.)
- The system will then give you the option to enter another combination which enables you to get additional S.A.M.E. county codes.

# The Internet Web Site of National Weather Service

www.nws.noaa.gov/nwr/indexnw.htm.

- At the left side of the page, click on "S.A.M.E. Coding."
- Below the heading, "Explanation of NWR and S.A.M.E.", click on "S.A.M.E. codes for states, counties, and territories."
- Click on your state.
- Find your county, and record the "S.A.M.E. #" (the S.A.M.E. county code) that is listed to the right of your county, and for any other counties in which you are interested.

# ogramming S.A.M.E. County Codes

# fault Factory Setting of S.A.M.E. County Codes:

ur Alert Works EAR-10 Emergency Alert Weather Radio comes preprogrammed receive NWS weather and hazard alert transmissions for **all** S.A.M.E. county les within range. If this is what you want, leave the radio set to "ANY."

## Program a Single S.A.M.E. County Code:

- Press MENU button to open menu options.
- Press UP directional arrow to scroll through menu options until "S.A.M.E.
   SET" is displayed; then press SELECT.
- Press UP directional arrow to scroll through "SINGLE", "MULTIPLE", or "ANY."
- Display "SINGLE," then press SELECT. "S.A.M.E. 01" will be displayed.
  (Note if you are programming a single S.A.M.E. county code, only the "01" setting will be used.)
- Press SELECT. Using the UP directional arrow, find the first digit of your S.A.M.E. county code. Press RIGHT directional arrow to save the digit and automatically advance to the next digit.
- Program all digits of your S.A.M.E. county code in the same way.
- Press SELECT to store your S.A.M.E. county code. Press MENU to close the programming menu.

## Program Multiple S.A.M.E. County Codes:

- Press MENU to open menu options
- Press UP directional arrow to scroll through menu options until "S.A.M.E. SET" is displayed; then press SELECT.
- Press UP directional arrow to scroll through "SINGLE", "MULTIPLE", or "ANY."
- Display "MULTIPLE" to enter more than one S.A.M.E. county code.
   "S.A.M.E. 01" will be displayed, indicating you will be programming your first S.A.M.E. county code at weather radio menu location "01."
- After programming your first S.A.M.E. county code, press SELECT, then
  the UP directional arrow to advance to "S.A.M.E. 02." Program all of your
  S.A.M.E. county codes in the same way.

# Reviewing the S.A.M.E. County Codes You Have Programmed:

To review the S.A.M.E. county codes you have programmed into your weather radio, press **MENU** to open the programming menu, and follow the same sequence you used to program them.

### Adding New S.A.M.E. Event Codes:

Periodically the National Weather Service may find it necessary to add new alert codes to the system. The EAR-10 will allow the user to program up to five new S.A.M.E. event codes into the radio. The new S.A.M.E. message code is divided into three categories.

- . Event code (PIL code)
- . Display the text message on the LCD
- Severity status of the event

The user must enter all three categories for the new S.A.M.E. message to function correctly. To add a new S.A.M.E. message code, please follow the following steps:

- Press the MENU button
- Press UP or DOWN button to show ADD ALERTS on the display.
- Press SELECT button to show NEW 1 --- on display. The number 1 should be blinking on the display
- Press UP or DOWN button to choose a different new alert number or press SELECT button to make your choice
- To activate the first of the three categories below NEW ALERT, press UP
  or DOWN button and LEFT or RIGHT button to select the alphabet
  characters to spell the three character event code of the new alert
- Next press the SELECT button to show the upper line of the display which will display the message received. Eleven character spaces are available for the description. Press UP or DOWN button or LEFT or RIGHT button to choose the letters and spaces for the description
- Next press the **SELECT** button to choose the level of the event All event codes ending in an **A** should be entered as a **WATCH**All event codes ending in **W** should be entered as a **WARNING**All event codes ending in **S** or **E** should be entered as an **ADVISORY**

# Nert Type (DISPLAY, VOICE, OR TONE)

- Press **MENU** to open menu options.
- Press UP directional arrow to scroll through menu options until "ALT TYPE" (Alert Type) is displayed; then press SELECT.
- Press UP directional arrow to scroll through the following (3) alert types: "DISPLAY", "VOICE", or "TONE."

Alart Type	con	Description of Tone Pattern
"DISPLAY" (none)		Text alert scrolls on display (no sound)
		The alert will sound for about 8
		seconds; then you will hear the voice
"VOICE"	//\	of the weather broadcast for about 5
(		minutes. If you want to listen longer,
		press WEATHER/SNOOZE.
		Alert tones will sound for five
		minutes, or until you press any
"TONE"	<u></u>	button —except
(		WEATHER/SNOOZE which toggles
		to voice weather broadcast.

- Press SELECT to choose the Alert Type you want.
- 6. Press **MENU** to exit menu programming mode.

#### ALERT OFF OPTION:

Your Alert Work's EAR-10 Emergency Alert Weather Radio allows you to program the radio to silence selected event codes in your area to minimize annoyance.

- Press MENU button to open menu options
- Press UP directional arrow to scroll through menu options until "ALERTOFF" is displayed
- Press SELECT
- Press the UP/DOWN directional arrow to select the event code that you
  wish to silence
- Press the LEFT or RIGHT directional arrow to set the selected event code to "ON or OFF"
- Press MENU to exit the programming mode

#### Alert Test:

To test the alert function and ensure that it is working, press **MENU**, then the **UP** directional arrow until "ALT TEST" is displayed. Press **SELECT** to sound the alert. Press the **UP** directional arrow to silence the alarm. Press **MENU** to exit.

# Test Signals Broadcast by the National Weather Service

All National Weather Service stations periodically transmit test signals. You can find out when your local NWS station broadcasts test signals by calling the NOAA National Weather Service Forecast Office (listed under 'Weather' in the Federal Government section of the telephone book).

During the weekly test signal, the local NWS station will give a list of counties covered by their transmitter. The NWS test signal allows everyone with weather radio receivers to verify the operation of their equipment.

The following test signals may be sent by the NWS during testing: required weekly test, required monthly test, system demo, and national periodic test.

During a test, the yellow advisory LED will illuminate and the test message will be visible on the display. The weather radio will not sound an audible alert or tone alert during this periodic NWS test.

## Weather Channel Frequencies:

Channels preset on Weather Monitor	Broadcast Frequency (MHz)
	162.400
2	162.425
ယ	162.450
4	162.475
<b>5</b> 1	162.500
6	162.525
7	162.550

You can find more information on weather frequency channels on the Internet website of National Weather Radio at www.nws.noaa.gov/nwr/indexnw.htm.

#### froubleshooting:

Problem	Suggestion
No power	Is AC Power Adapter securely plugged into both DC lack on back of
	weather radio and into wall outlet? If
	AC power has failed, are batteries
	installed?
No sound	Check VOLUME.
No weather	<ul> <li>Ensure that telescoping</li> </ul>
broadcast when	antenna is up and fully
you press	extended.
WEATHER/	<ul> <li>If you are using an external</li> </ul>
SNOOZE button	antenna, ensure that it is
	connected properly.
	<ul> <li>Ensure that the radio is set to</li> </ul>
	the NOAA weather channel in
	use in your area. Contact
	NOAA to ensure they are
	presently broadcasting.
The radio is not	Check to see that you have
responding properly	programmed in the correct S.A.M.E.
to NWS weather	county code(s).
alert broadcasts	

For assistance with your Alert Works EAR-10 Emergency Alert Weather Radio contact: questions@alert-works.com

# About NOAA, NWS, & S.A.M.E. County Codes

In 1994, the National Oceanic and Atmospheric Administration (NOAA) began broadcasting coded emergency signals that identify the specific geographic area (such as the county within a state) that is affected by an emergency. Until that time such specific emergency weather information was not available directly to the public. NOAA transmits the coded emergency signals using a technique called Specific Area Message Encoding (S.A.M.E.) The Alert Works EAR-10 Emergency Alert Weather Radio is designed to receive these S.A.M.E. county code transmissions.

The National Weather Service divides the United States by state and county (or parish) and assigns a six digit code number called a Federal Information Processing System (FIPS) code, also known as a S.A.M.E. county code.

You can program the Alert Works EAR-10 Emergency Alert Weather Radio with up to 25 S.A.M.E. county codes. The weather radio allows you to receive broadcast alerts for your own county, and/or up to 25 other counties. This will eliminate the broadcast of any alerts that are not within your area of interest.

When you program your S.A.M.E. county code(s) into the weather radio, you eliminate any alerts that are not within those counties. Warnings, watches and statements of weather and other area emergencies — about 50 different types — will activate the weather radio for only your programmed area(s).

The S.A.M.E. message the NWS sends contains information pertaining to the period for which the alert is valid. NWS can set the active time of the alert from 15 minutes to 6 hours. When the designated time has passed, the weather radio display message and light will automatically reset to their normal appearance.

### S.A.M.E. County Code Record:

Use this space to keep a record of the S.A.M.E. county codes you program into your Alert Works EAR-10 Emergency Alert Weather Radio.

County Name	S.A.M.E. County Code	NWR Channel*
		100
		***************************************
Attendance of the state of the		
100		
711111	1777	

\*Note if you have reason to switch between different weather radio channels, you may also wish to record the channel used for a particular county NWR frequency.

### Reviewing Recent Alerts:

The Alert Works EAR-10 Emergency Alert Weather Radio can store up to 10 different Weather/Hazard alerts (with overlapping effective times) in its memory. If the weather radio receives a new alert while any previous alert is still in effect, it automatically displays the new alert. You can review all alerts still in effect by pressing the UP directional arrow to scroll through the weather radio's active ale memory. A double beep indicates the end of the list. "NO MESSAGE" will be displayed if no alerts are active.

# ONE YEAR LIMITED WARRANTY:

The Alert Works EAR-10 Emergency Alert Weather Radio is warranted to be free of defects in parts and workmanship for a period of one year from the date of purchase by its original owner. If this product is found to be defective, Alert Works will repair or replace the defective parts at no charge, excluding shipping costs, subject to the following conditions:

- Owner must request a return authorization from Alert Works. Please complete the warranty request form located on our website www.alert-works.com
- Owner must include verification of the date of purchase when requesting Limited Warranty Service.

For questions, please email us at questions@alert-works.com.

Website address: www.alert-works.com

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

# Out of Warranty & Product Service:

If your Alert Works EAR-10 Emergency Alert Weather Radio fails to operate properly, check the "Troubleshooting" section in this manual before returning it for service.

Service Return Procedure:

 Pack the unit in its original box and packing. Then pack the original box in a suitable shipping carton. Caution: Improper packing may result in damage to the unit during shipment.

- Include the following:
- Full description of any problems;
- Money order for \$7.50 to cover return shipping and handling (may not be required in some states);
- Daytime telephone number, name and address.
- For warranty service, include a photocopy of the bill of sale from an authorized dealer or other proof of purchase showing the date of sale.
- You do not need to return accessory items (AC/DC adapter, batteries, User's Guide) unless they might be directly related to the problem.
- 5) A flat rate of \$25.00 will apply to repairs not covered by warranty or on units that are over one year old or on units determined to be abused. Send only cashier's check, money order, Master Card or Visa card number. DO NOT send cash or personal check!

#### Specifications:

Specifications are nominal and subject to change.

#### General

## FCC COMPLIANCE INFORMATION:

# Alert Works Emergency Alert Weather Radio Model EAR-10, "S.A.M.E. Digital Weather/Hazard Alert Radio"

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference; (2) This device must accept any interference received including interference that may cause undesired operation.